

INDOOR LINEAR LIGHTING

LINEAR COMBO



## LINEAR COMBO APPLICATION

*EVERY PLACE WHERE LIGHT QUALITY AND EASY MAINTENANCE MATTERS*


SHOPS



COMMUNICATION




WORKSHOPS

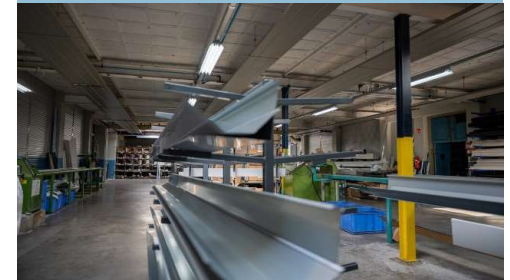

- *WHERE LUMINAIRE MUST BE SURFACE MOUNTED OR CREATE A LIGHTLINE*
- *WHERE YOU NEED EASY MAINTENANCE AND FLEXIBILITY (CCT AND POWER SWITCH)*
- *WHERE YOU NEED HIGH LUMEN PACKAGE AND EFFICIENCY (UP TO 9000lm@150lm/W)*
- *WHERE OCCUPANCY SENSOR IS REQUIRED*

LINEAR  
COMBO

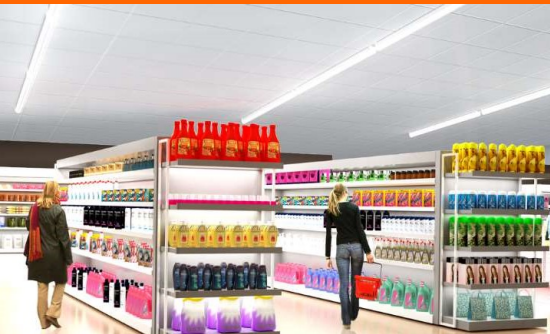

## LINEAR COMBO PORTFOLIO

# LINEAR COMBO



**+** Portfolio

- 1200 mm
- 1500 mm
- 30/34/35/40W SWITCH
- 27/40/50/60W SWITCH
- 120°
- 3000K  
4000K  
6500K
- DALI
- SENSOR




**+** USP

- 70000 L70
- 5Y GUARANTEE\*\*
- 150 lm/W
- PC
- 5-pole PUSH TERMINAL

## LINEAR COMBO APPLICATION

# LINEAR COMBO

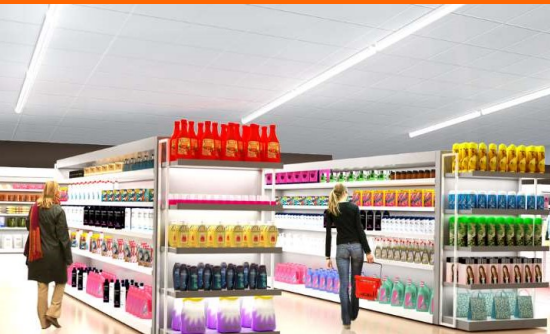

**HIGH EFFICIENCY:  
UP TO 150lm/W**



**IMPRESSIVE LIFESPAN:  
L70 100 000h**



**HIGH QUALITY  
PC COVER  
MATERIAL**



**VERSION WITH  
SENSOR**



**ENEC CERTIFIED**



**VERSION WITH  
DALI DRIVER**

# LINEAR COMBO – EASY INSTALLATION – NO TOOLS







## LINEAR COMBO

**ONE SKU- 3 CCTs, 4 WATTAGES!**

**12 SKUs IN ONE!**




**CCT**  
CCT  
SELECTABLE

LN COMBO 1200 V 40W PS 3CCT WT			W
LN COMBO 1200 V 40W PS 3CCT SEN WT			
	ON	ON	30
	ON	OFF	34
	OFF	ON	35
	OFF	OFF	40
LN COMBO 1500 V 60W PS 3CCT WT			W
LN COMBO 1500 V 60W PS 3CCT SEN WT			
	ON	ON	27
	ON	OFF	40
	OFF	ON	50
	OFF	OFF	60


**W**  
↑  
**W**  
POWER  
SELECTABLE

Product	Wattage	CCT
CONFIG 1	27W	3000K
CONFIG 2	27W	4000K
CONFIG 3	27W	6500K
CONFIG 4	40W	3000K
CONFIG 5	40W	4000K
CONFIG 6	40W	6500K
CONFIG 7	50W	3000K
CONFIG 8	50W	4000K
CONFIG 9	50W	6500K
CONFIG 10	60W	3000K
CONFIG 11	60W	4000K
CONFIG 12	60W	6500K

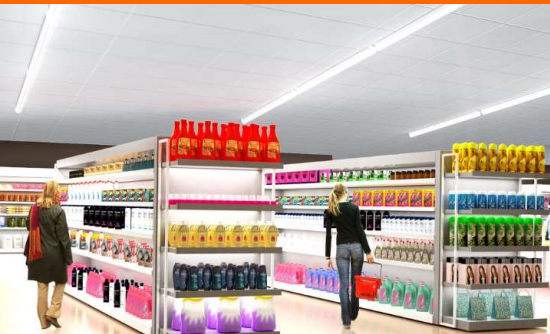


## LINEAR COMBO – EASY INSTALLATION – NO TOOLS

### LINEAR COMBO

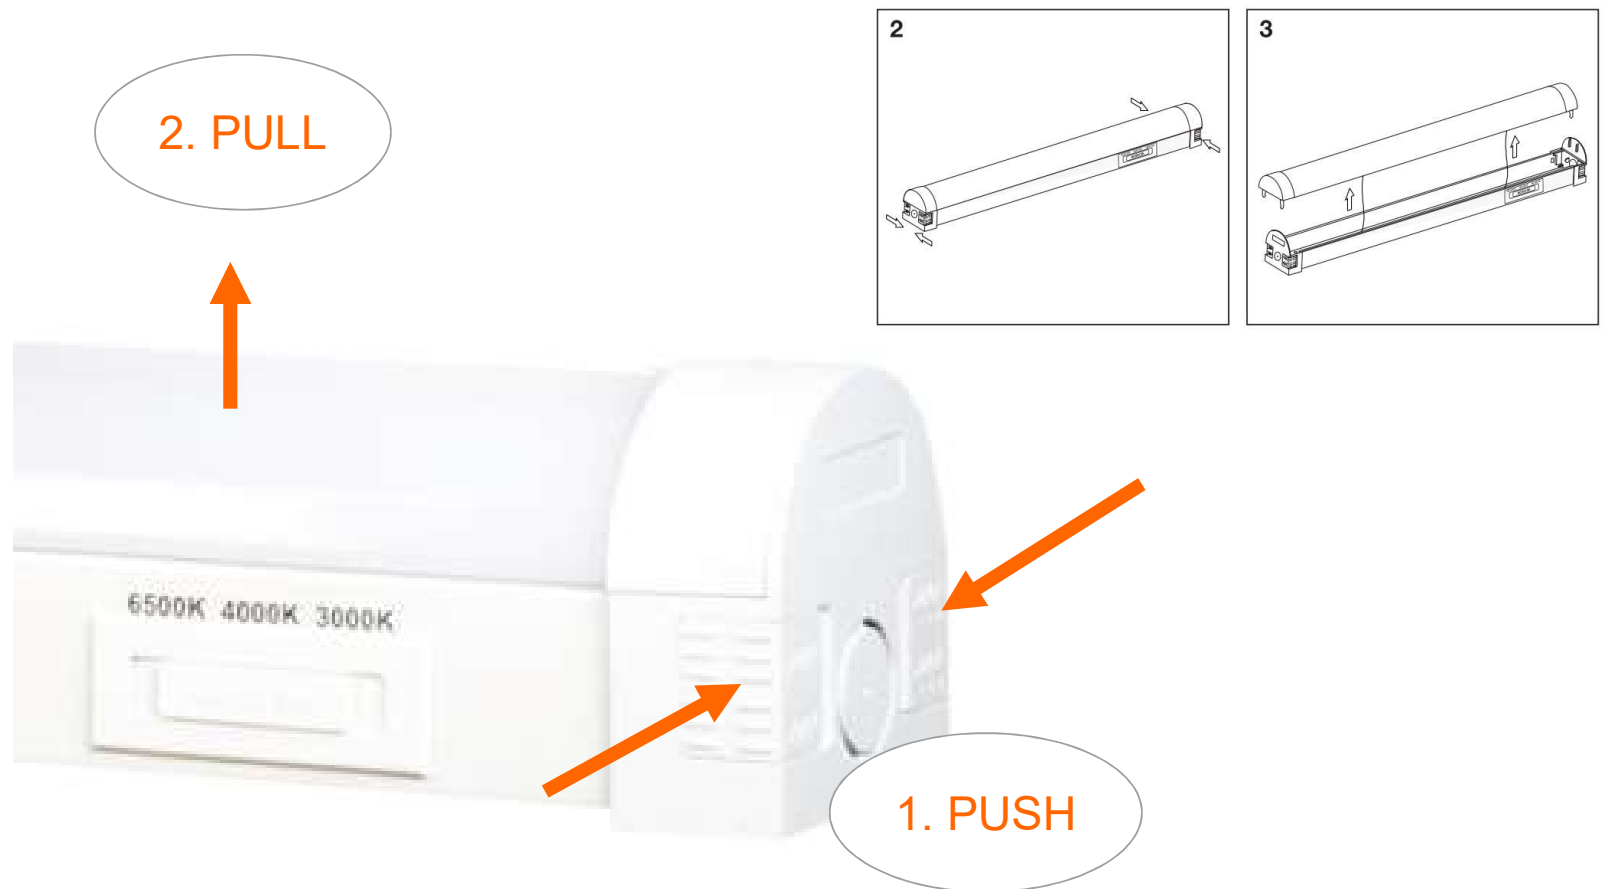

# LINEAR COMBO UNIQUE SELLING POINTS

## LINEAR COMBO



**POWER SELECTABLE**



**THROUGH WIRE READY**



**EASY MAINTENANCE**






**CCT SELECTABLE**



## OCUPANCY SENSOR - CONFIGURATION

### ADVANCED, DEEPLY CONFIGURABLE MICROWAVE SENSOR

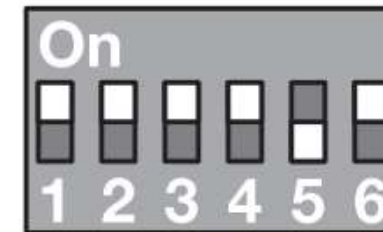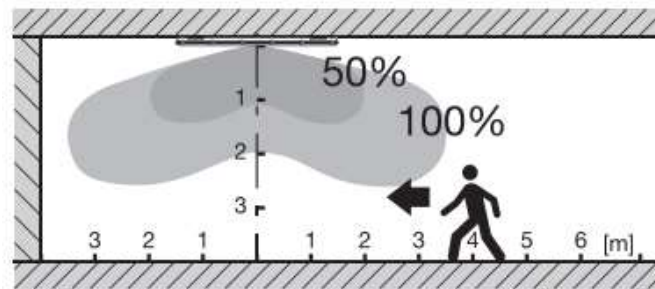

Detection Area

<b>1</b>	
-	100%
ON	50%



Hold Time

<b>2</b>	<b>3</b>	
-	-	5s
-	ON	60s
ON	-	3min
ON	ON	10min



Daylight threshold

<b>4</b>	
-	Disable
ON	30lux



Stand-by DIM level

<b>5</b>	
-	0%
ON	20%



Stand-by period

<b>6</b>	
-	$\infty$
ON	15min

**LINEAR  
COMBO**












## LINEAR COMBO UNIQUE SELLING POINTS

### FOUR STEP WATTAGE SELECTION TO PERFECTLY OPTIMIZE EVERY PROJECT

# LINEAR COMBO

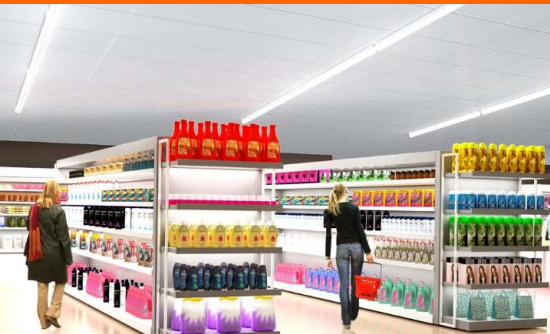

LN COMBO 1200 V 40W PS 3CCT WT LN COMBO 1200 V 40W PS 3CCT SEN WT	<b>PIN 1</b> 	<b>PIN 2</b> 	W
<b>230V</b>  <b>LED</b>	ON	ON	30
	ON	OFF	34
	OFF	ON	35
	OFF	OFF	40
LN COMBO 1500 V 60W PS 3CCT WT LN COMBO 1500 V 60W PS 3CCT SEN WT	<b>PIN 1</b> 	<b>PIN 2</b> 	W
<b>230V</b>  <b>LED</b>	ON	ON	27
	ON	OFF	40
	OFF	ON	50
	OFF	OFF	60

## PRODUCT LIST

# LINEAR COMBO



Model name	EAN10	Power	Flux	Luminous efficacy	CCT	CRI	Dimensions	Guarantee
		[W]	[lm]	[lm/W]	[K]		[mm]	[years]
LN COMBO 1200 V 40W PS 3CCT WT	4099854228292	30-40	up to 6000	140/150	3CCT	>80	1200X64X65	5
LN COMBO 1500 V 60W PS 3CCT WT	4099854228315	40-60	up to 9000	140/150	3CCT	>80	1500X64X65	5
LN COMBO 1200 V 40W 3CCT DALI WT	4099854228339	40	up to 6000	140/150	3CCT	>80	1200X64X65	5
LN COMBO 1500 V 60W 3CCT DALI WT	4099854228353	60	up to 9000	140/150	3CCT	>80	1500X64X65	5
LN COMBO 1200 V 40W PS 3CCT SEN WT	4099854228377	30-40	up to 6000	140/150	3CCT	>80	1200X64X65	5
LN COMBO 1500 V 60W PS 3CCT SEN WT	4099854228391	40-60	up to 9000	140/150	3CCT	>80	1500X64X65	5