



**Product Management Team**



**URBAN LANTERN**

## URBAN LANTERN

### URBAN LANTERN

*EVERY PROJECT THAT REQUIRES STYLISH DESIGN LUMINAIRE ON THE POLE*

#### PARKS




#### NEIGHBOURHOODS



#### SQUARES



- *WHERE DESIGN MATTERS*
- *WHERE YOU NEED HIGH TECHNICAL SPECIFICATION*
- *WHERE THE LUMINAIRE NEEDS TO BE INSTALLED ON POST TOP*
- *WHERE HIGH PROTECTION GRADE (IP66/IK010) IS REQUIRED*

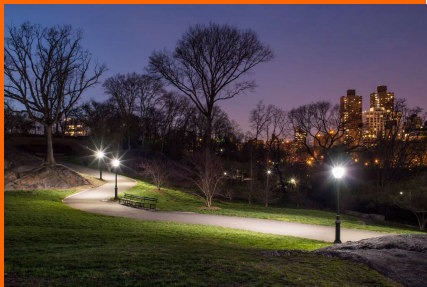

## URBAN LANTERN

## URBAN LANTERN



**+** Portfolio

15/20/25/29 W SWITCHABLE	34/42/49/59 W SWITCHABLE
3000K 4000K SWITCH	up to 139 lm/W
Grey	Black



**+** USP

5Y WARRANTY	100 000 L80B10
IP66	IK10
Sym 145 deg	Asym 165x65 Deg
	48-60 pole

## URBAN LANTERN OVERVIEW

### URBAN LANTERN



**IMPRESIVE LIFESPAN:**  
L80B10 100 000h



**HIGH EFFICIENCY:**  
UP TO 139lm/W




**HIGH INGRESS  
PROTECTION**



**HIGH MECHANICAL  
PROTECTION**




**ENEC CERTIFIED**

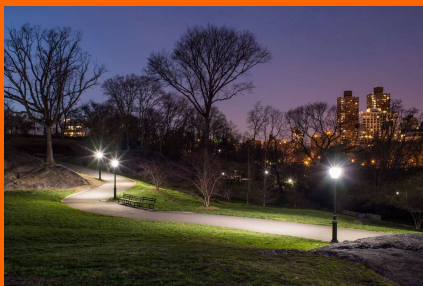


## URBAN LANTERN – TWO COLORS TO CHOOSE FROM

DIFFERENT HOUSING COLOR TO FIT EVERY PROJECT

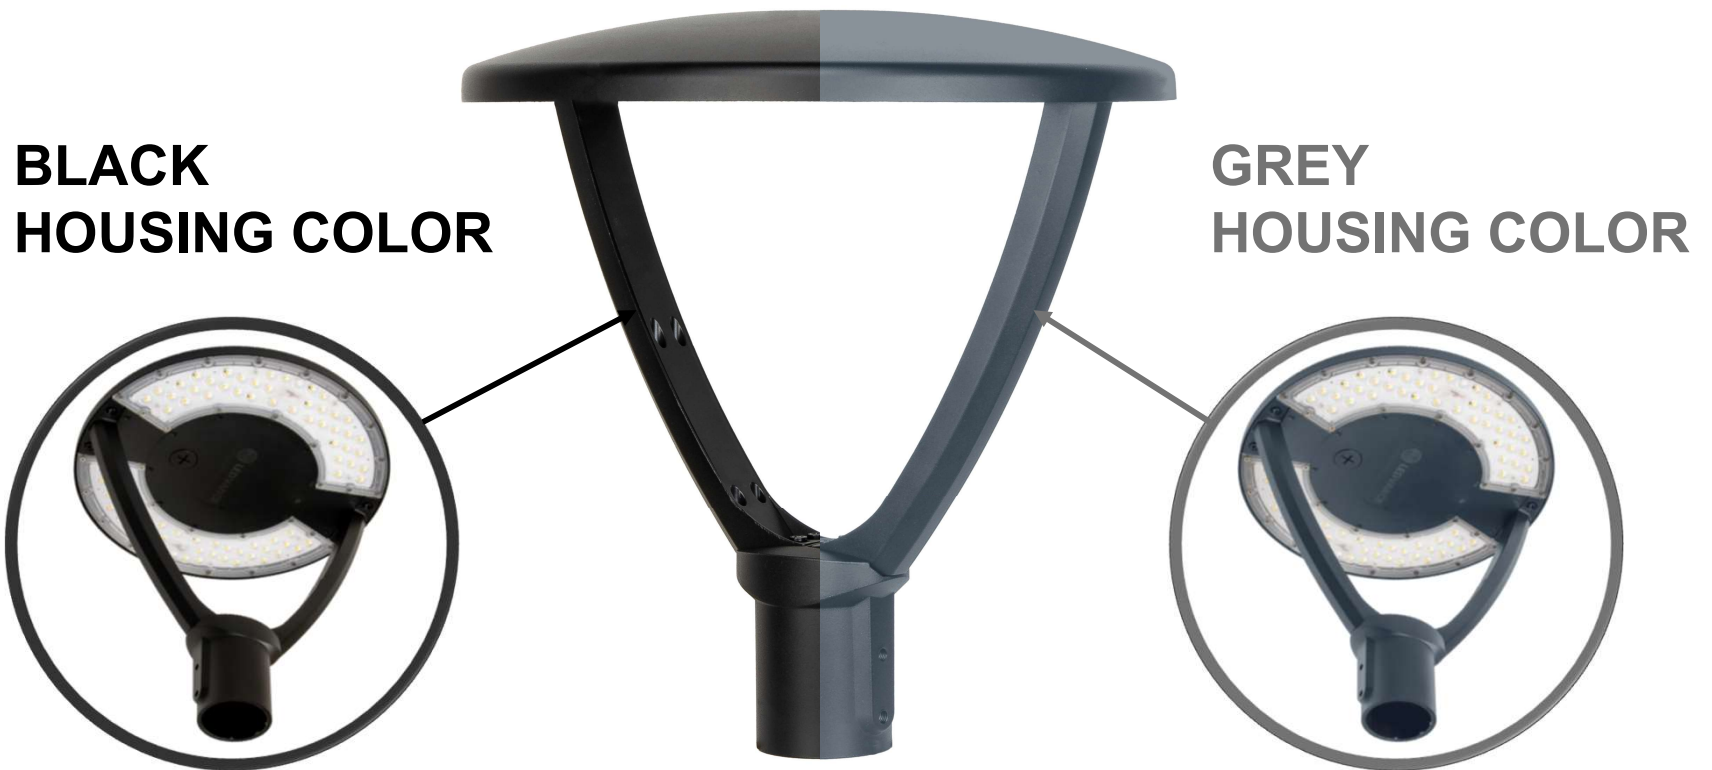

URBAN  
LANTERN

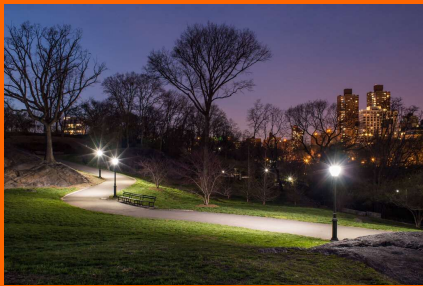

# URBAN LANTERN – SELECTABLE CCT AND WATTAGE


**ONE SKU- 2 CCTs, 4 WATTAGES!**



**8 SKUs IN ONE!**

Product	Wattage	CCT
CONFIG 1	29W	3000K
CONFIG 2	29W	4000K
CONFIG 3	25W	3000K
CONFIG 4	25W	4000K
CONFIG 5	19W	3000K
CONFIG 6	19W	4000K
CONFIG 7	15W	3000K
CONFIG 8	15W	4000K

**URBAN  
LANTERN**

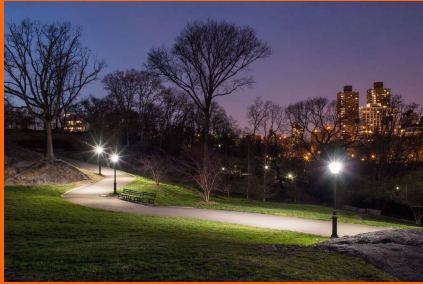

# URBAN LANTERN – SELECTABLE CCT AND WATTAGE


ONE SKU- 2 CCTs, 4 WATTAGES!



8 SKUs IN ONE!

Product	Wattage	CCT
CONFIG 1	59W	3000K
CONFIG 2	59W	4000K
CONFIG 3	49W	3000K
CONFIG 4	49W	4000K
CONFIG 5	42W	3000K
CONFIG 6	42W	4000K
CONFIG 7	34W	3000K
CONFIG 8	34W	4000K


URBAN LANTERN

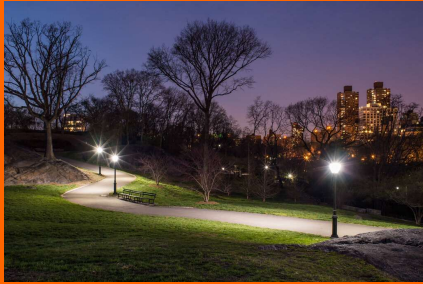


## URBAN LANTERN OPTICAL VARIANTS

DIFFERENT BEAM ANGLES HELP TO OPTIMISE EVERY PROJECT


URBAN  
LANTERN

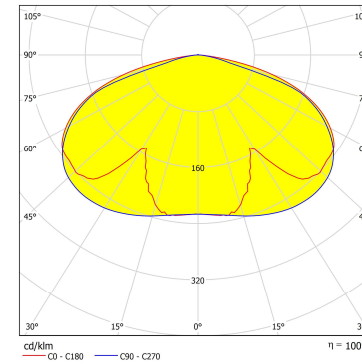

OPTION 1:  
SYMMETRIC  
BEAM ANGLE

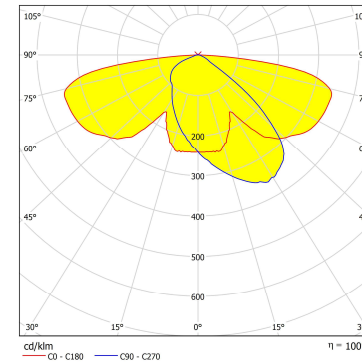


OPTION 2:  
ASYMMETRIC  
BEAM ANGLE

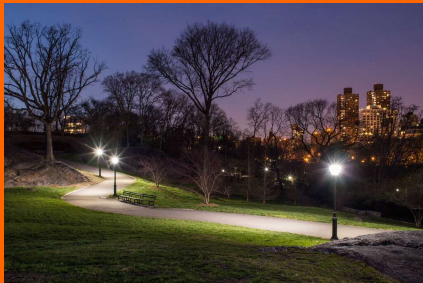



## URBAN LANTERN PORTFOLIO

# URBAN LANTERN

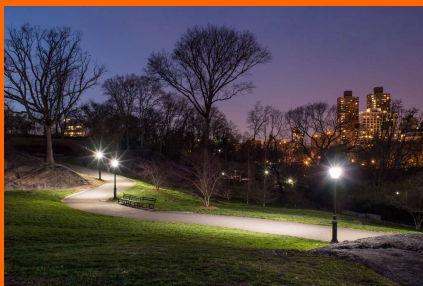

Model name	EAN	Housing color	Power	Eff.	CCT	BEAM ANGLE	Op. temp	CRI	Ingress protection	IK	Guarantee
			[W]	[lm/W]	[K]		[°C]				[years]
URBAN LANTERN V 29W SYM PS 830-840 IP66 GY	4099854246838	Grey	15-19-25-29	3000K: 130lm/W 4000: 136lm/W	3000/4000	145deg	-30..+50	>80	IP66	IK10	5
URBAN LANTERN V 29W SYM PS 830-840 IP66 BK	4099854246845	Black	15-19-25-29	3000K: 130lm/W 4000: 136lm/W	3000/4000	145deg	-30..+50	>80	IP66	IK10	5
URBAN LANTERN V 29W ASYM PS 830-840 IP66 GY	4099854246852	Grey	15-19-25-29	3000K: 130lm/W 4000: 136lm/W	3000/4000	165x65deg	-30..+50	>80	IP66	IK10	5
URBAN LANTERN V 29W ASYM PS 830-840 IP66 BK	4099854246784	Black	15-19-25-29	3000K: 130lm/W 4000: 136lm/W	3000/4000	165x65deg	-30..+50	>80	IP66	IK10	5
URBAN LANTERN V 59W SYM PS 830-840 IP66 GY	4099854246791	Grey	34-42-49-59	3000K: 133lm/W 4000: 139lm/W	3000/4000	145deg	-30..+50	>80	IP66	IK10	5
URBAN LANTERN V 59W SYM PS 830-840 IP66 BK	4099854246807	Black	34-42-49-59	3000K: 133lm/W 4000: 139lm/W	3000/4000	145deg	-30..+50	>80	IP66	IK10	5
URBAN LANTERN V 59W ASYM PS 830-840 IP66 GY	4099854246814	Grey	34-42-49-59	3000K: 133lm/W 4000: 139lm/W	3000/4000	165x65deg	-30..+50	>80	IP66	IK10	5
URBAN LANTERN V 59W ASYM PS 830-840 IP66 BK	4099854246821	Black	34-42-49-59	3000K: 133lm/W 4000: 139lm/W	3000/4000	165x65deg	-30..+50	>80	IP66	IK10	5